

# Voltage Regulator VRG8684

3A LDO Adjustable Positive Voltage Regulator

Released Datasheet


[Cobham.com/HiRel](http://Cobham.com/HiRel)

March 24, 2016

# COBHAM

The most important thing we build is trust

## FEATURES

- ❑ Manufactured using  Space Qualified RH1084 die
- ❑ Radiation performance
  - Total dose: 100 krad(Si), Dose rate = 50-300 rad(Si)/s
- ❑ Thermal shutdown
- ❑ Output voltage adjustable: 1.25V to 23V
- ❑ Dropout voltage: 1.80V at 3.0 Amps
- ❑ 3-Terminal
- ❑ Output current: 3.0Amps
- ❑ Voltage reference: 1.25V +2%, -3.2%
- ❑ Load regulation: 0.35% max
- ❑ Line regulation: 0.25% max
- ❑ Ripple rejection: >60dB
- ❑ Packaging – Hermetic Ceramic
  - SMD-0.5 Surface mount
  - 3 Pads, .400"L x .296"W x .120"Ht
  - Power package
  - Weight - 2 gm max
- ❑ Designed for aerospace and high reliability space applications
- ❑ **Radiation Hardness Assurance Plan: DLA Certified to MIL-PRF-38534, Appendix G.**


## DESCRIPTION

The VRG8684 consists of a Positive Adjustable (RH1084) LDO voltage regulator capable of supplying 3.0 Amps over the output voltage range as defined under recommended operating conditions. The VRG8684 offers excellent line and load regulation specifications and ripple rejection.

The VRG8684 serves a wide variety of applications including SCSI-2 Active Terminator, High Efficiency Linear Regulators, Post Regulators for Switching Supplies, Constant Current Regulators, Battery Chargers and Microprocessor Supply.

The VRG8684 has been specifically designed to meet exposure to radiation environments and is configured for a SMD-0.5 SMT power package. It is guaranteed operational from -55°C to +125°C. Available screened in accordance with MIL-PRF-38534, the VRG8684 is ideal for demanding military and space applications.

Dropout ( $V_{IN} - V_{OUT}$ ) decreases at lower load currents.

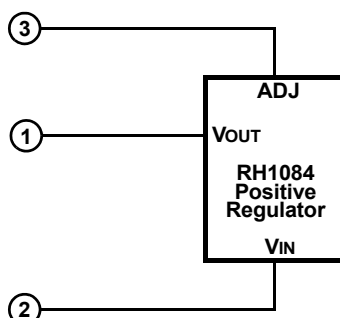

**FIGURE 1 – BLOCK DIAGRAM / SCHEMATIC**

## ABSOLUTE MAXIMUM RATINGS

Parameter	Rating	Units
Lead temperature (soldering 10 Sec)	300	°C
Input Output Differential	25	V <sub>DC</sub>
Load Current, maximum	6.0	A
ESD (MIL-STD-883, M3015, Class 2)	2000 to 3999	V
Operating Junction Temperature Range	-55 to +150	°C
Storage Temperature Range	-65 to +150	°C
Thermal Resistance (Junction to Case) $\Theta_{JC}$	2	°C/W

NOTICE: Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress rating only; functional operation beyond the "Operation Conditions" is not recommended and extended exposure beyond the "Operation Conditions" may effect device reliability.

## RECOMMENDED OPERATING CONDITIONS

Parameter	Range	Units
Output Voltage Range	1.25 to 23	V <sub>DC</sub>
Input Output Differential	1.8 to 24	V <sub>DC</sub>
Case Operating Temperature Range	-55 to +125	°C

## ELECTRICAL PERFORMANCE CHARACTERISTICS <sup>1/</sup>

UNLESS OTHERWISE SPECIFIED:  $-55^{\circ}\text{C} \leq T_C \leq +125^{\circ}\text{C}$

Parameter	Symbol	Conditions ( $P \leq P_{MAX}$ )	Min	Max	Units
Reference Voltage <sup>3/</sup> , <sup>2/</sup>	V <sub>REF</sub>	$1.5\text{V} \leq (V_{IN} - V_{OUT}) \leq 15\text{V}$ , $10\text{mA} \leq I_{OUT} \leq 3.0\text{A}$	1.210	1.275	V
Dropout Voltage <sup>2/</sup>	V <sub>DROP1</sub>	$\Delta V_{REF} = 1\%$ , $I_{OUT} = 5.0\text{A}$	-	1.8	V
Dropout Voltage <sup>2/</sup>	V <sub>DROP2</sub>	$\Delta V_{REF} = 1\%$ , $I_{OUT} = 3.0\text{A}$	-	1.4	V
Line Regulation <sup>3/</sup> , <sup>2/</sup>	$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	$I_{LOAD} = 10\text{mA}$ , $1.5\text{V} \leq (V_{IN} - V_{OUT}) \leq 15\text{V}$	-	0.5	%
Load Regulation <sup>3/</sup> , <sup>2/</sup>	$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$	$10\text{mA} \leq I_{OUT} \leq 3.0\text{A}$ , $(V_{IN} - V_{OUT}) = 3\text{V}$	-	0.35	%
Adjust Pin Current <sup>2/</sup>			-	120	μA
Adjust Pin Current Change <sup>2/</sup>		$10\text{mA} \leq I_{OUT} \leq 3.0\text{A}$ , $1.5\text{V} \leq (V_{IN} - V_{OUT}) \leq 15\text{V}$	-	5	μA
Minimum Load Current <sup>4/</sup> , <sup>2/</sup>	I <sub>MIN</sub>	$(V_{IN} - V_{OUT}) = 25\text{V}$	-	10	mA
Current Limit <sup>2/</sup>	I <sub>CL</sub>	$(V_{IN} - V_{OUT}) = 5\text{V}$	5.25		A
Ripple Rejection <sup>3/</sup>		$I_{OUT} = 3.0\text{A}$ , $(V_{IN} - V_{OUT}) = 3\text{V}$ , $f = 120\text{Hz}$ , $C_{ADJ} = C_{OUT} = 25\mu\text{F}$	60	-	dB
Thermal Regulation		30ms pulse, $T_C = +25^{\circ}\text{C}$	-	0.04	%/W
V <sub>REF</sub> Long-Term Stability <sup>4/</sup>		Burn In: $T_C = +125^{\circ}\text{C}$ @ 1000hrs minimum, Tested at $+25^{\circ}\text{C}$ .	-	1.0	%


Notes:

<sup>1/</sup> The manufacturer's output current rating for the RH1084MK positive regulator integrated circuit is 5.0 Amps. For Compliance with the Current Density specification of MIL-STD-883 Rev. C, the electrical performance characteristics are specified at an output current of 3.0 Amps.

<sup>2/</sup> Specification derated to reflect total dose exposure to 100 krad(Si) at  $+25^{\circ}\text{C}$ .


<sup>3/</sup> Line and load regulation are guaranteed up to the maximum power dissipation of 15W. Power dissipation is determined by the input/output differential voltage and the output current. Guaranteed maximum power dissipation will not be available over the full input/output voltage range.

<sup>4/</sup> Not tested. Shall be guaranteed by design, characterization, or correlation to other tested parameters.

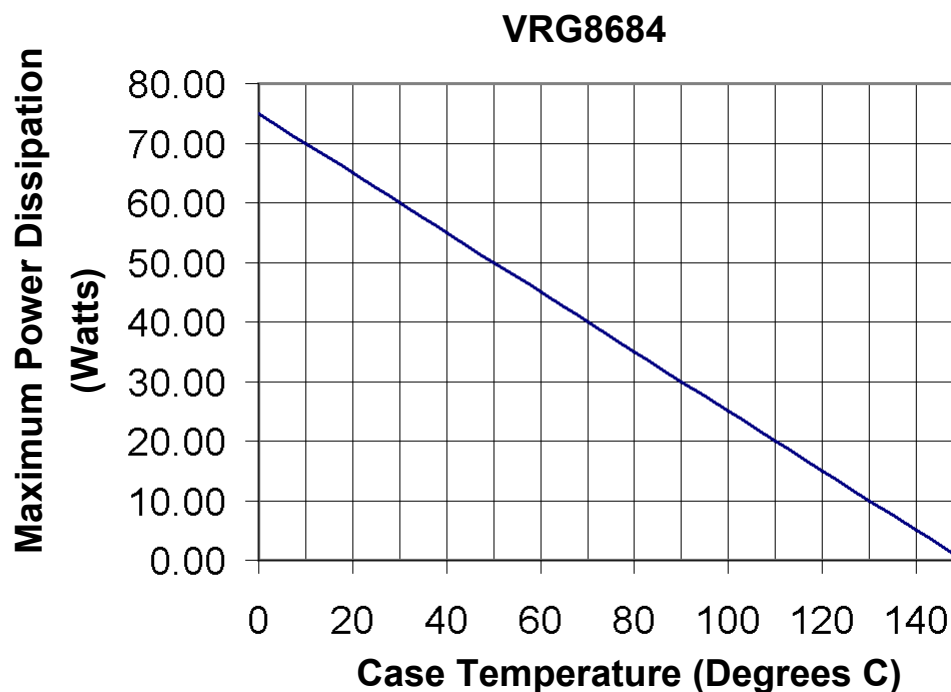

**FIGURE 2 – MAXIMUM POWER vs CASE TEMPERATURE**

The maximum Power dissipation is limited by the thermal shutdown function of the regulator chip in the VRG8684. The graph above represents the achievable power before the chip shuts down. The line in the graph represents the maximum power dissipation of the VRG8684. This graph is based on the maximum junction temperature of 150°C and a thermal resistance ( $\Theta_{JC}$ ) of 2°C/W.

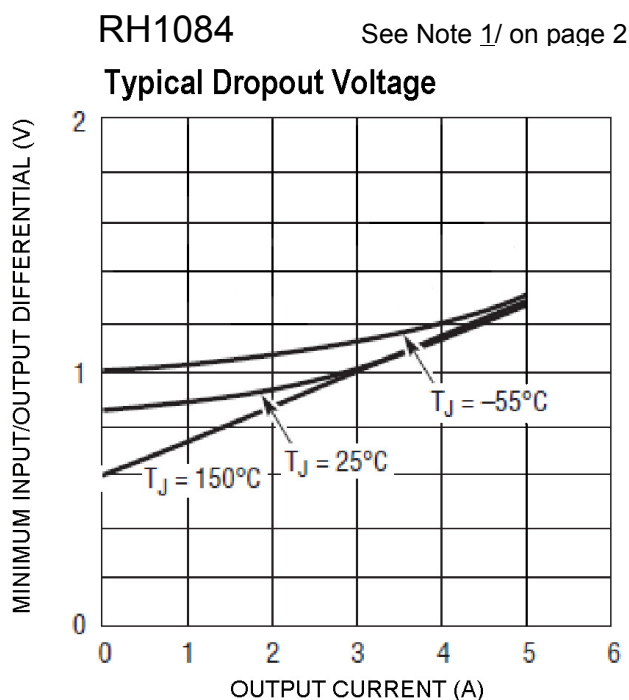

**FIGURE 3 – RH1084 DROPOUT VOLTAGE CURVE**

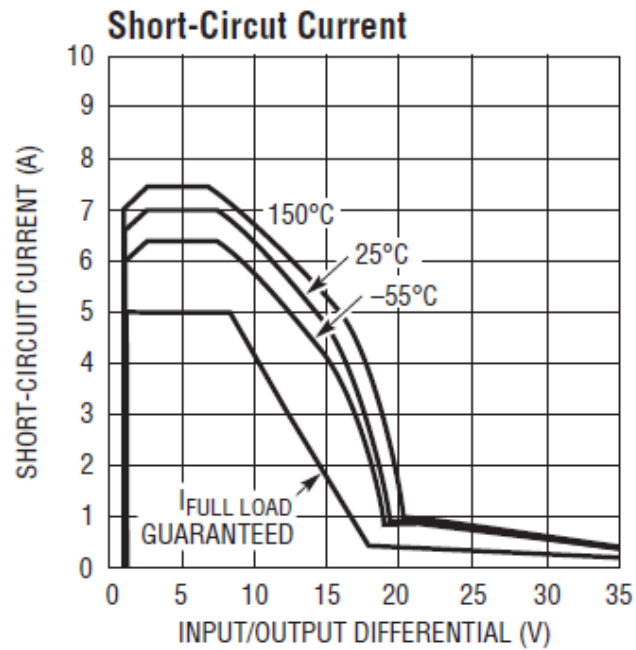


FIGURE 4 – RH1084 SHORT CIRCUIT CURRENT


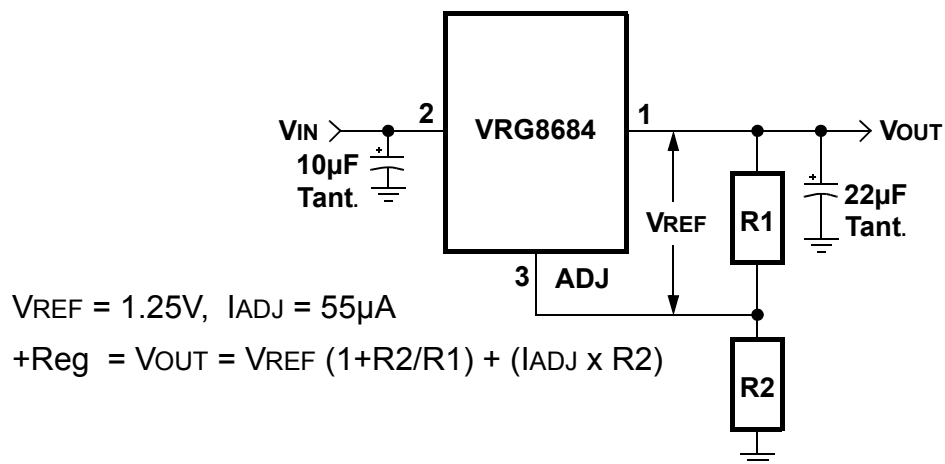


FIGURE 5 – BASIC RH1084 ADJUSTABLE REGULATOR APPLICATION

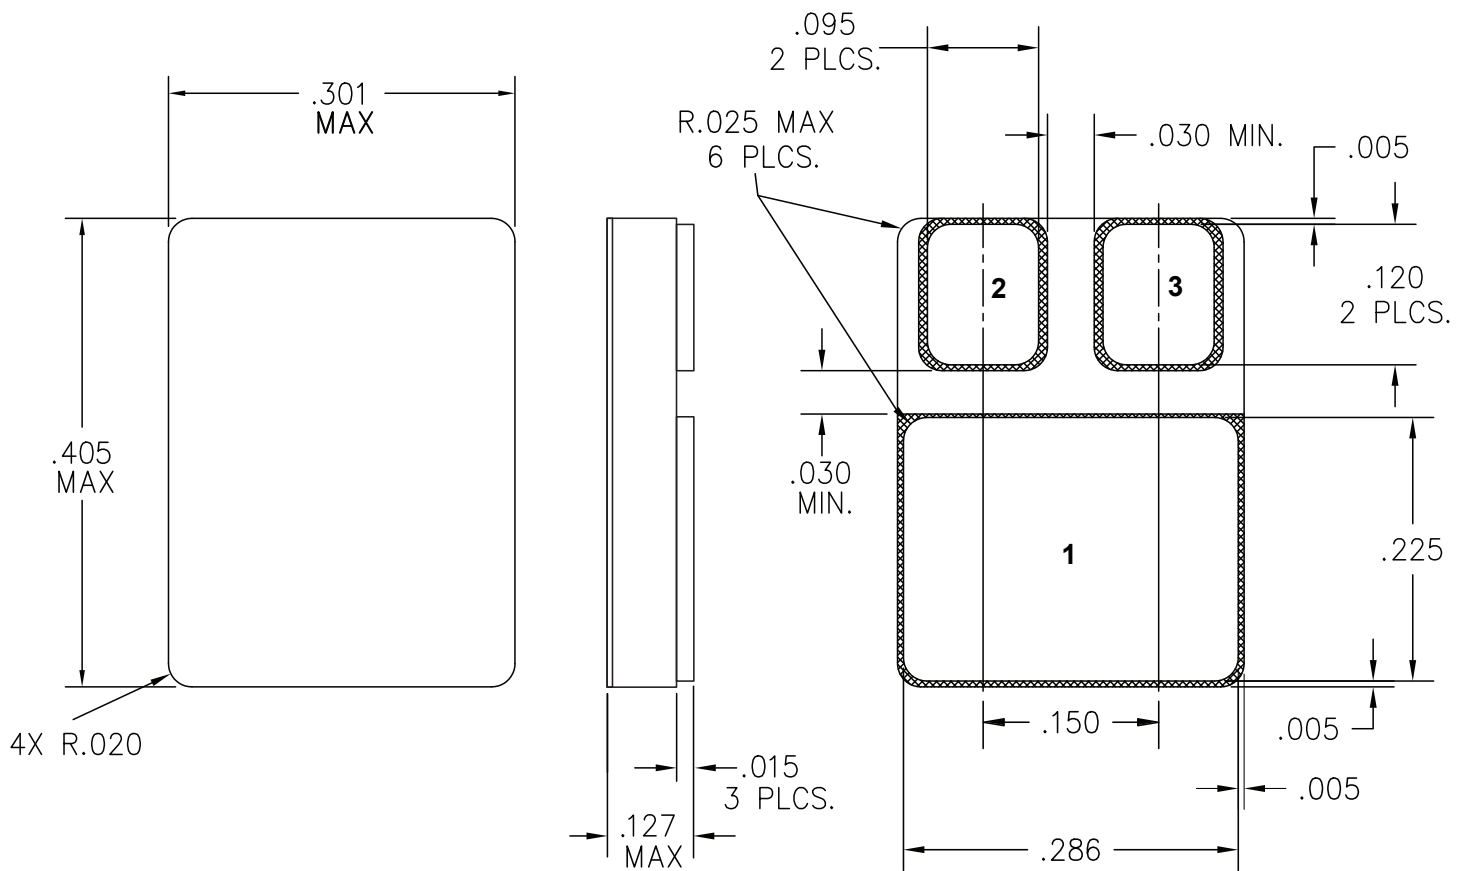

NOTE: Package & Lid are electrically isolated from signal pads.

**FIGURE 6 – VRG8684 PACKAGE OUTLINE — SURFACE MOUNT**

## ORDERING INFORMATION

Model	DLA SMD #	Screening	Package
VRG8684-7	-	Commercial Flow, +25°C testing only	SMD-0.5 Power Pkg
VRG8684-S	-	Military Temperature, -55°C to +125°C Screened in accordance with the individual Test Methods of MIL-STD-883 for Space Applications	
VRG8684-201-1S	5962-0924501KXC	In accordance with DLA SMD	
VRG8684-201-2S	5962-0924501KXA		
VRG8684-901-1S	5962R0924501KXC	In accordance with DLA Certified RHA Program Plan to RHA Level "R", 100 krad(Si)	
VRG8684-901-2S	5962R0924501KXA		

## REVISION HISTORY

Date	Revision	Change Description
03/24/2016	D	Import into Cobham format


## Datasheet Definition

Advanced Datasheet - Product In Development

Preliminary Datasheet - Shipping Prototype

Datasheet - Shipping QML & Reduced Hi-Rel



For detailed performance characteristic curves, applications information and typical applications, see the latest  datasheet for their RH1084, which is available on-line at [www.linear.com](http://www.linear.com).

LT, LTC, Linear Technology and the Linear logo are registered trademarks and RH1084 is copyright Linear Technology Corporation.

### EXPORT CONTROL:

*This product is controlled for export under the Export Administration Regulations (EAR), 15 CFR Parts 730-774.  
A license from the Department of Commerce may be required prior to the export of this product from the United States.*

Cobham Semiconductor Solutions  
35 S. Service Road  
Plainview, NY 11803

E: [info-ams@cobham.com](mailto:info-ams@cobham.com)  
T: 800 645 8862

**COBHAM**

Aeroflex Plainview Inc., DBA Cobham Semiconductor Solutions, reserves the right to make changes to any products and services described herein at any time without notice. Consult Aeroflex or an authorized sales representative to verify that the information in this data sheet is current before using this product. Aeroflex does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by Aeroflex; nor does the purchase, lease, or use of a product or service from Aeroflex convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of Aeroflex or of third parties.